


# 12GP Heavy Duty Pipe Gooseneck

<b>G.V.W.R.</b>	12,000#	<b>AXLES</b>	Two 6,000# EZ Lube w/Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	6,000#	<b>SUSPENSION</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>COUPLER</b>	2-5/16" Ball Adjustable Pipe	<b>TIRE</b>	ST235/80 D-16 Load Range E
<b>SAFETY CHAINS</b>	3/8" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b>	16 x 6 White Spoke 8 Bolt
<b>JACK</b>	12K Drop Leg Jack (Bolted On)	<b>FLOOR</b>	2" Pine
<b>NECK</b>	8" Channel	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b>	2-7/8" Pipe Square Back	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	5" x 3" x 1/4" Angle	<b>FINISH (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>CROSSMEMBERS</b>	3" x 2" x 3/16" Angle	<b>FINISH</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
<b>UPRIGHTS</b>	3" x 2" x 3/16" x 16"		
<b>FENDERS</b>	9" x 72" Double Broke Diamond Plate w/ Back		

## Standard Features

- Gooseneck w/2-5/16" Adjustable Coupler
- Safety Chains Attdhd w/Cold Rolled Eyelets
- 2-7/8" Top Rail Capped w/Self Sealing Plugs on 20' & shorter
- 3" Sq. Tube Top Rail on 22' & Longer
- Tie Down Pockets, Sides & Front
- Floor Secured w/Torx Screws
- Reflective Marker Tape
- Cambered EZ Lube Axles w/Electric Brake on Each
- Complete Break-A-Way System w/Charger
- Spare Tire Mount
- 4' Slide In Ramps (Channel)
- Grommet Mount Sealed Lighting

Dimensions			
Length	A	B	C
18'	217-1/2"	145"	72-1/2"
20'	240"	160"	80"

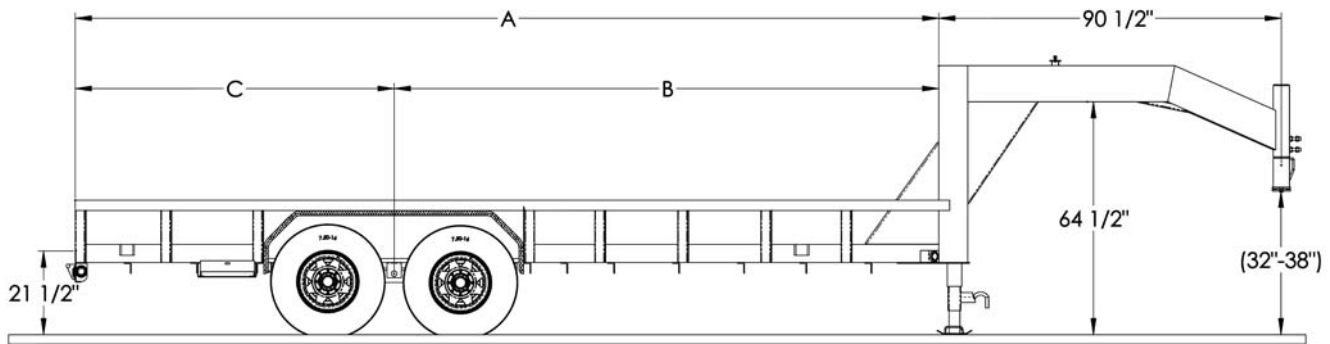

MODEL#	WEIGHT	DESCRIPTION
12GP-18	2,930#	83" x 18' Gooseneck Tandem Axle Pipe Trailer
12GP-20	3,100#	83" x 20' Gooseneck Tandem Axle Pipe Trailer

### OPTIONS

Electric Over Hydraulic Brakes (Drums)	Rampgate in Lieu of Ramps
Spare Tire (ST235 D-16 LR-E)	Gas Spring Assist Option - Rampgate
Tire Upgrade (ST235/80 R-16 LR-E)	4' Heavy Duty Integrated Ramp Gate w/Gas Spring Assist in Lieu of Ramps
Spare Tire Upgrade (ST235/80 R-16 LR-E)	5' Stand Up Ramps in Lieu of Slide In
LED Lighting	