


120A Tandem Axle Over The Axle

G.V.W.R.	12,000#	AXLES	Two 6,000# EZ Lube w/Electric Brakes
G.A.W.R. (Ea. Axle)	6,000#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	Adjustable Forged 2-5/16"	TIRE	235/80 D-16 Load Range E
SAFETY CHAINS	1/4" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 White Spoke 8 Bolt
JACK	7K Drop Leg Jack (Bolted On)	FLOOR	2" Pine
TONGUE	Integral w/Frame	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	10" I-Beam	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	3" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS	5" X 3" x 1/4" Angle w/Stake Pockets & Rubrail on Both Sides, Front & Rear		

Standard Features

- Adjustable Forged Coupler in Channel
- Safety Chains Attached w/Cold Rolled Eyelets
- 7K Drop Leg Jack (Bolted On)
- Rub Rail w/Stake Pockets
- Reflective Marker Tape
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles w/Electric Brake on Each
- Complete Break-A-Way System w/Charger
- Spare Tire Mount
- Rubber Mounted Sealed Lighting

Dimensions			
Length	A	B	C
16'	193-1/2"	115"	78-1/2"
18'	217-1/2"	127"	90-1/2"
20'	240"	138"	102"

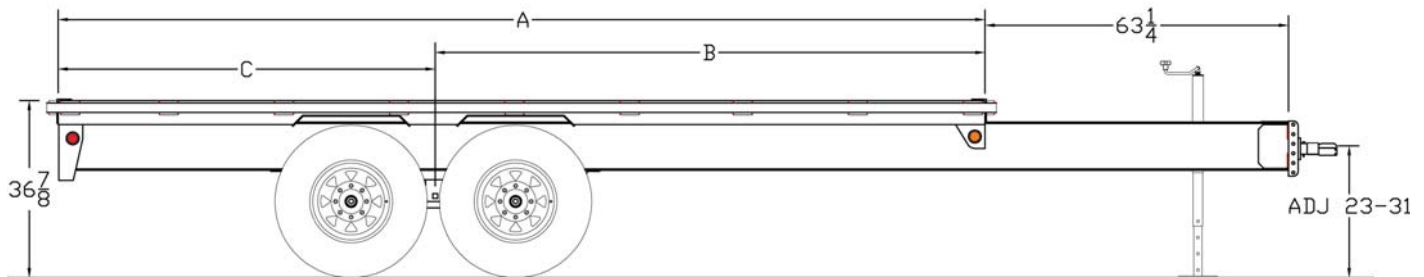

MODEL#	WEIGHT	DESCRIPTION
120A-16	3,100#	102" x 16' Tandem Over The Axle Trailer
120A-18	3,210#	102" x 18' Tandem Over The Axle Trailer
120A-20	3,325#	102" x 20' Tandem Over The Axle Trailer

OPTIONS

Adjustable Pintle in Channel	Spare Tire Upgrade (ST235/80 R-16 LR-E)
12K Drop Leg Jack - Top Wind	LED Lighting
Hydraulic Surge Brakes 2 Axles	8' Slide In Ramps
Spare Tire (235/80 D-16 LR-E)	4' Dovetail w/5' Stand Up Ramps (in existing length)
Tire Upgrade (ST235/80 R-16 LR-E)	