


24ED/24AD Pintle Equipment Transport

G.V.W.R.	30,000#	AXLES	Two 12,000# Heavy Duty Dual Wheel Axles - Oil Bath; Electric Brakes (ED) or Air Brakes (AD)
G.A.W.R. (Ea. Axle)	12,000#	SUSPENSION	44K Adjustable
COUPLER	60K, 3" ID Pintle Eye	TIRE	ST235/80 R-16 Load Range G
SAFETY CHAINS	1/2" Grd. 80 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 Dual 8 Bolt
JACK	12K TW Drop Leg Jack	FLOOR	2" Nominal Oak (S4S)
TONGUE	Integral w/Frame	LIGHTS	LED D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	12" - 22# I-Beam	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	6" Jr. I-Beam on 16" Centers	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS	8" Channel		

Standard Features

- 3 Position Pintle Adjustment
- Safety Chains Attdch w/Cold Rolled Eyelets
- Storage Area in Tongue
- Modular Sealed Wiring Harness
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- 2 Side Bed Steps
- Oak Flooring
- 6 - 5/8" O.D. D-Rings
- 12-1/4 x 4 HD Brakes; Electric has complete Break-A-Way System and Air has Automatic Slack Adjusters, Spring Brakes and ABS
- 5' Dove Tail w/Double Hinged Spring Assist Ramps
- Grommet Mount Sealed LED Lighting

Dimensions With Dovetail			
Length	A	B	C
20' + 5'	300"	113"	187"
24' + 5'	348"	137"	211"

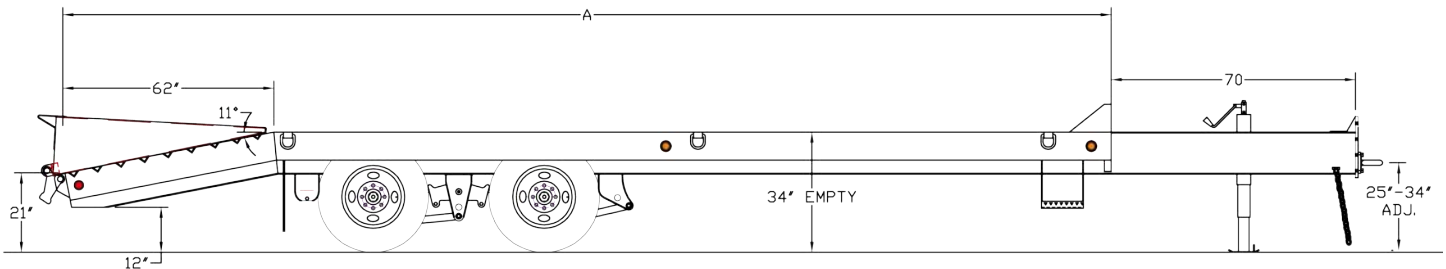

MODEL#	WEIGHT	DESCRIPTION
*24ED-20+5	5,900#	102" x 20' + 5' Tandem Dual 30,000# Pintle w/Electric Brakes
*24ED-24+5	7,020#	102" x 24' + 5' Tandem Dual 30,000# Pintle w/Electric Brakes
*24AD-20+5	6,100#	102" x 20' + 5' Tandem Dual 30,000# Pintle w/Air Brakes
*24AD-24+5	6,300#	102" x 24' + 5' Tandem Dual 30,000# Pintle w/Air Brakes

OPTIONS

Vertical Spare Mount	Extra 5/8" D- Ring (Each)
Single 2 Speed Drop Leg Jack	Spare Tire (ST235/80 R-16 LR-G Dual)
Dual 2 Speed Landing Gear Jacks (50K)	Tire Upgrade (ST215/75 R-17.5 LR-H)
Lockable Lid Cover Tool Storage in Tongue	Spare Tire Upgrade (ST215/75 R-17.5 LR-H)

*** Trailer is subject to Federal Excise Tax**