60CH Tandem Axle Car Hauler Special

G.V.W.R.	6,000#	AXLES	Two 3,500# EZ Lube w/1 Elec. Brake	
G.A.W.R. (Ea. Axle)	3,500#	SUSPENSION	Multi-Leaf Spring w/Equalizer	
COUPLER	2" A-Frame	TIRE	ST205/75-15 Load Range C	
SAFETY CHAINS	1/4" Grd. 70 w/Safety Latch Hook	WHEEL	15 x 5 White Spoke 5 Bolt	
JACK	2K Top Wind (Bolted On)	FLOOR	2" Pine	
TONGUE	4" Channel	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance	
TOP RAIL	None	ELEC. PLUG	7-Way RV	
FRAME	5" x 3" x 1/4" Angle	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.	
CROSSMEMBERS	3" x 2" x 3/16" Angle			
UPRIGHTS	None	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.	
FENDERS	9" x 72" Rolled Formed w/Back (Bolted On)			


Standard Features -

- Safety Chains Attached w/Cold Rolled Eyelets
- Sand Foot on Jack
- Lower Jack Support Plate

- Tie Down Pockets Sides & Front
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles w/1 Electric Brake
- Complete Break-A-Way System w/Charger
- Grommet Mount Sealed Lighting

Shown with Optional Slide In Ramps

Dimensions						
Length	Α	В	С			
14'	169-1/2"	103"	66-1/2"			
16'	193-1/2"	115"	78-1/2"			

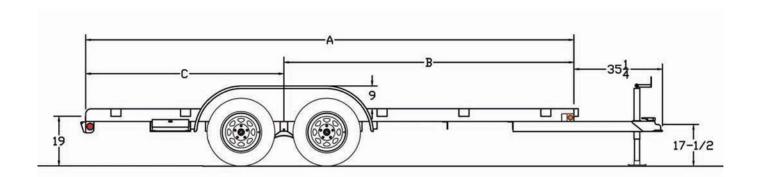

MODEL#	WEIGHT	DESCRIPTION
60CH-14	1,620#	83" x 14' Tandem Axle Trailer
60CH-16	1,670#	83" x 16' Tandem Axle Trailer

OPTIONS

2" Forged Coupler	Spare Tire Mount	
2-5/16" Forged Coupler	Spare Tire (ST205/75-15 LR-C)	
Electric Brakes on 2nd Axle	LED Lighting	
Hydraulic Surge Brakes 1 Axle	4' Slide In Ramps	
Hydraulic Surge Brakes 2 Axles		

STANDARD MODEL - NO OTHER OPTIONS AVAILABLE