


# 5XGL Lowboy Heavy Equipment Transport

<b>G.V.W.R.</b>	59,800#	<b>AXLES</b>	Two 22,500# Dual Wheel Air Brake - Oil Bath
<b>G.A.W.R. (Ea. Axle)</b>	18,160#	<b>SUSPENSION</b>	44K Adjustable
<b>COUPLER</b>	SAE 2" Kingpin	<b>TIRE</b>	215/75R 17.5 Load Range H
<b>JACK</b>	Adjustable 4 Position Landing Legs	<b>WHEEL</b>	6.75 x 17.5, 10 Bolt Budd
<b>NECK</b>	16" 31# I-Beam	<b>FLOOR</b>	2" Nominal Oak (S4S)
<b>FRAME</b>	16" 31# I-Beam	<b>LIGHTS</b>	LED D.O.T. Stop, Tail, Turn & Clearance
<b>CROSSMEMBERS</b>	10" 12# I-Beam	<b>ELEC. PLUG</b>	7-Way Semi Style Socket
<b>SIDE RAILS</b>	12" Channel	<b>FINISH (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
		<b>FINISH</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.

## Standard Features

- Storage Area in Neck
- Modular Sealed Wiring Harness w/Junction Box
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- 12" Channel Side Rails
- 2 Side Bed Steps
- Oak Flooring
- 8 - 1" O.D. D-Rings
- Rubber Mounted Sealed LED Lighting
- Heavy Duty Oil Bath w/12-1/4" x 7-1/2" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on Both Axles
- Anti-Skid Brake System on Front Axle
- 3' Dove Tail w/5' Double Hinged Spring Assist Ramps

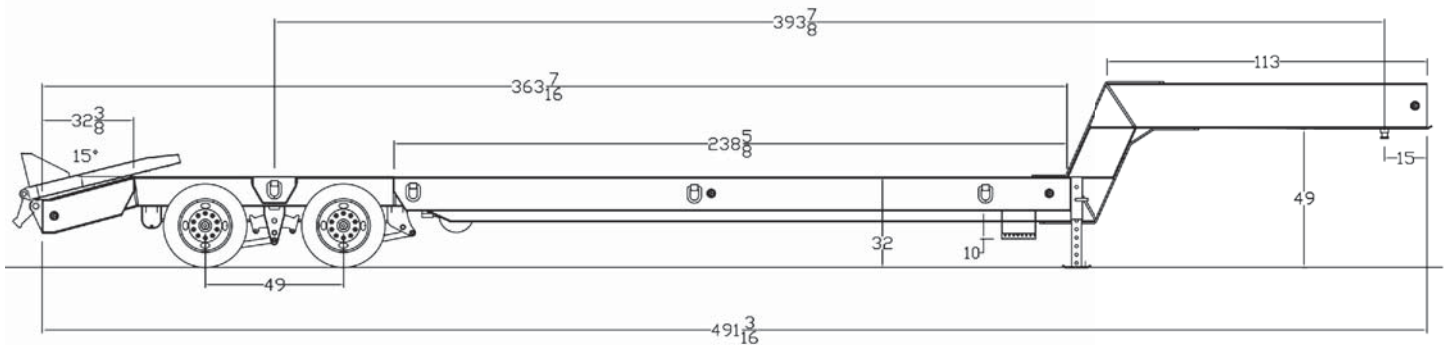

MODEL#	WEIGHT	DESCRIPTION
*5XGL-20+3	11,600#	102" x 20' Equipment Transport

### OPTIONS

Spare Tire (215/75R 17.5 LR-H)	Plate Over The Tires (Raises bed height by 2")
Full Width Neck	ABS on 2nd Axle
Dual Two Speed Landing Gear Jacks (50K)	1" D-Ring (Each)

**\* Trailer is subject to Federal Excise Tax**