


100A Tandem Axle Over The Axle

G.V.W.R.	9,990#	AXLES	Two 5,200# EZ Lube w/Electric Brakes
G.A.W.R. (Ea. Axle)	5,080#	SUSPENSION	Multi-Leaf Spring w/Equalizer
COUPLER	Adjustable Forged 2-5/16"	TIRE	ST225/75-15 Load Range D
SAFETY CHAINS	1/4" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	15 x 6 White Spoke 6 Bolt
JACK	7K Drop Leg - Top Wind (Bolted On)	FLOOR	2" Pine
TONGUE	Integral w/Frame	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	10" I-Beam	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	3" x 3.5" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS	5" X 3" Angle w/Stake Pockets & Rubrail on Both Sides, Front & Rear		

Standard Features

- Adjustable Forged Coupler
- Stake Pockets & Rubrail All 4-Sides
- Complete Break-A-Way System w/Charger
- Safety Chains Attached w/Cold Rolled Eyelets
- Reflective Marker Tape
- Spare Tire Mount
- 7K Drop Leg Jack (Bolted On)
- Floor Secured w/Torx Screws
- Grommet Mount Sealed Lighting
- Cambered EZ Lube Axles w/Electric Brake on Each

Dimensions			
Length	A	B	C
16'	193-1/2"	115"	78-1/2"
18'	217-1/2"	127"	90-1/2"
20'	240"	138"	102"

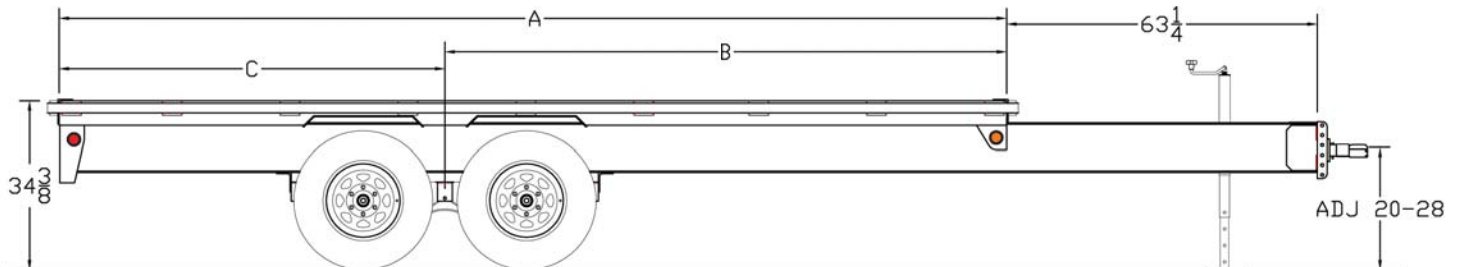

MODEL#	WEIGHT	DESCRIPTION
100A-16	3,000#	102" x 16' Tandem Over The Axle Trailer
100A-18	3,110#	102" x 18' Tandem Over The Axle Trailer
100A-20	3,225#	102" x 20' Tandem Over The Axle Trailer

OPTIONS

Adjustable Pintle in Channel	Spare Tire Upgrade (ST235 D-16 LR-E)
12K Drop Leg Jack - Top Wind	LED Lighting
Hydraulic Surge Brakes 2 Axles	8' Slide In Ramps
Spare Tire (ST225/75-15 LR-D)	4' Dovetail w/5' Stand Up Ramps (in existing length)
Tire Upgrade (ST235 D-16 LR-E)	